

**Its easy to test
temperature up to
1350°C**

**A wide range of
sensors available**

- 1 K-type thermocouple input
- Robust: protective shock-proof sheath

Measurement range	-40 °C to +1350 °C
Resolution	a choice of 0.1° or 1°
Accuracy	± (0.1 % of the reading + 1 °C)

- ✓ Choice of measurement unit: °C / °F
- ✓ Hold and Maximum functions
- ✓ Backlit 2000-ct display

Operating conditions:

- Temperature: 0 to 50 °C
- Humidity: < 80 % RH

Storing conditions:

- Temperature: -20 °C to +60 °C
- Humidity: < 80 % RH

Power supply: 1 x 9 V battery

Dimensions: 173 x 60.5 x 38 mm

Mass: 185 g

*Supplied with 1 flexible
K-type thermocouple
sensor (-40 °C to +200 °C)*



PHYSICS
Line

C.A 861

**K-type
Thermocouple
Thermometer**


**Contact
Thermometry**



Food Service
Industry



HVAC systems




Production



Industrial
Refrigeration



Electrical,
Mechanical
Maintenance



Storage



Logistics



Museums,
Libraries,
Archives



Distribution


To order

C.A 861 K-type Thermocouple Thermometer

P01.6501.01Z

How to choose a thermometer?

In order to determine which measurement instruments are best adapted to your needs, ask yourself the following questions:

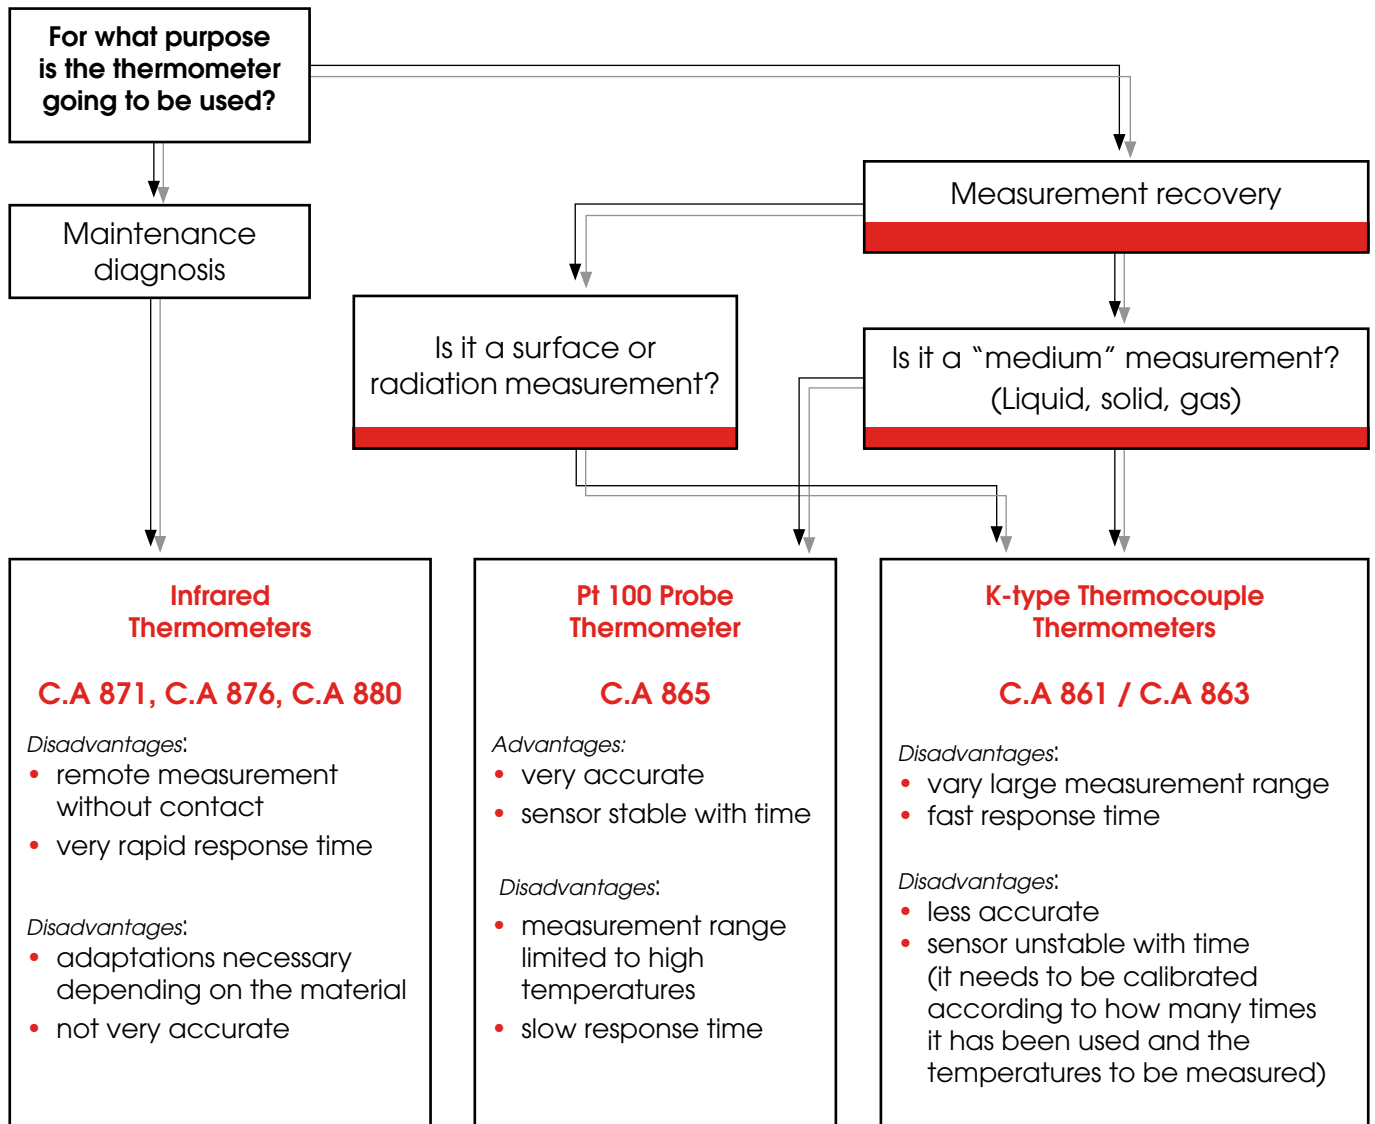

Some advice for making good measurements:

- ➔ **Measurements with a penetrating sensor:** the end of the sensor needs to penetrate into a medium that is at least 10 times its diameter.
- ➔ **Air temperature measurements:** do not place hand on the active part of the sensor to avoid heating or cooling it. It is not a problem if the air or gas is in movement. However, if the air is, as we say, "immobile" (ex: ambient temperature) shake the sensor for 10 to 20 seconds before making the measurement.
- ➔ **Surface temperature measurements:** it is preferable to use infrared technology thermometers for making measurements on insulating material surfaces (low thermal conductivity) such as plastic, wood, ceramic, cement, paper, etc. The surface of the material should be in good condition.



ASRAS CO.,LTD.
1694, 1694/1 Prachasongkhro Road,
Dindaeng, Dindaeng, Bangkok 10400
Tel. 02-692-3980, Fax. 02-692-3978
E-mail: sales@asras.com
www.asras.com; www.asras.co.th

