


NI8U-M12-AN6X Inductive sensor

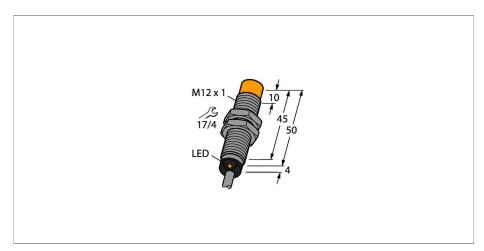


Technical data

Туре	NI8U-M12-AN6X
ID number	1644120
Rated switching distance	8 mm
Mounting conditions	Non-flush
Secured operating distance	≤ (0,81 x Sn) mm
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ± 10 %
	≤ ± 15 %, ≤ -25 °C v ≥ +70 °C
Hysteresis	315 %
Ambient temperature	-30+85 °C
Operating voltage	1030 VDC
Residual ripple	≤ 10 % U _{ss}
DC rated operational current	≤ 200 mA
No-load current	≤ 20 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, NPN
Protection class	
Switching frequency	2 kHz
Design	Threaded barrel, M12 × 1
Dimensions	54 mm
Housing material	Metal, CuZn, Chrome-plated
Active area material	Plastic, LCP
End cap	Plastic, EPTR

Features

- M12 × 1 threaded barrel
- Chrome-plated brass
- Factor 1 for all metals
- Resistant to magnetic fields
- Extended temperature range
- High switching frequency
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- NO contact, NFN out
- Cable connection

Wiring diagram




Inductive sensors detect metal objects contactless and wear-free. *uprox*® Factor 1 sensors have significant advantages due to their patented ferrite-coreless multicoil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.




Technical data

10 Nm
Cable
Ø 5.2 mm, LifYY, PVC, 2 m
3 x 0.34 mm ²
55 Hz (1 mm)
30 g (11 ms)
IP67
874 years acc. to SN 29500 (Ed. 99) 40 °C
LED yellow

Mounting instructions/Description





Distance D	48 mm
Distance W	3 x Sn
Distance T	45 mm
Distance S	1.5 x B
Distance G	6 x Sn
Distance N	2 x Sn
Diameter active area B	Ø 12 mm


Mounting accessories



QM-12 6945101 Quick-mount bracket with dead-stop; material: Chrome-plated brass Male thread M16 x 1. Note: The switching

distance of proximity switches can be

reduced by the use of quick-mount brackets.




BST-12B 6947212 Fixing clamp for threaded barrel devices, with dead-stop; material: PA6



9,5 19,1 14,3 38,1 1,8 7,9 MW-12 6945003

Mounting bracket for threaded barrel devices; material: Stainless steel A2 1.4301 (AISI 304)



BSS-12 6901321

Mounting bracket for smooth and threaded barrel devices; material: Polypropylene