SYN 269 h

Item no.: 2690008



Time and light control Analogue time switches

Description

- 1 channel
- Without power reserve
- Synchronised with mains
- Switching preselection
- Permanent ON/OFF switch
- Simple summer/winter time correction
- Time can be changed clockwise or anti-clockwise
- 32 tappets included in delivery
- Analogue time switch with daily or weekly program (switching disc can be turned)
- Tappets
- Shortest switching time: 20 minutes or 2 hours
- Clock hands for time display
- Switching status display



Technical data

| | SYN 269 h |
|---|--|
| Operating voltage | 230 V AC |
| Frequency | 50 Hz |
| Number of channels | 1 |
| Installation type | Front panel installation/wall installation |
| Type of connection | Screw terminals |
| Drive | Synchronous motor |
| Program | Daily program, Weekly program |
| Switching capacity at 250 V AC, cos φ = 1 | 10 A |

| | SYN 269 h |
|---|--|
| Switching capacity at 250 V AC, cos φ = 0,6 | 2 A |
| Shortest switching times | 20, 2 min |
| Programmable every | 5, 30 min |
| Time accuracy at 25 °C | Synchronised with mains |
| Type of contact | Changeover contact |
| Switching output | Potential-free and phase- independent |
| Stand-by consumption | 0.9 W |
| Housing and insulation material | High-temperature resistant, self- extinguishing thermoplastic |

SYN 269 h


Item no.: 2690008



Technical data

| | SYN 269 h |
|---------------------|-----------------------------|
| Type of protection | IP 20 |
| Protection class | II according to EN 60 730-1 |
| Ambient temperature | -10°C 55°C |

Connection example





SYN 269 h

Item no.: 2690008



Scale drawings

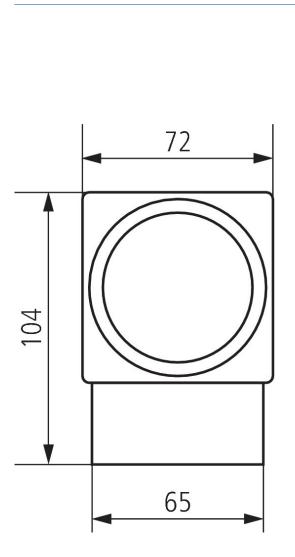

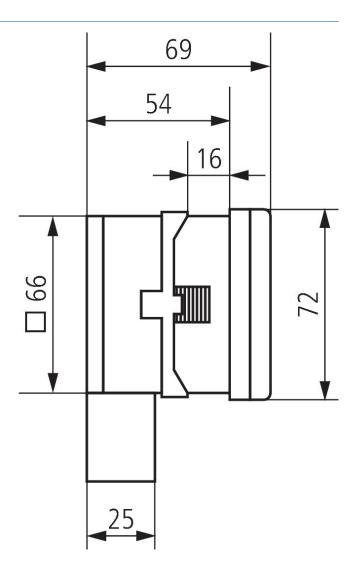

Accessories

Snap-on mounting 72 x 72 Item no.: 9070071

